

COMBI 22


is a Pinning/Taping machine for stack preparation before the PCB drilling process. Executes **simultaneously** the pinning and taping operation **on the shortest edges** (pin edges) and with a second cycle only the taping **on the longest edges**.

MAIN

1. Solidity.
2. high
3. Simple setup : 3 hand wheels for pin distance (X axis), stop on end on the Y axis and distance between tapes with digital measure
4. Only pneumatic operation (high reliability).

FEATURES:

productivity.
reading.

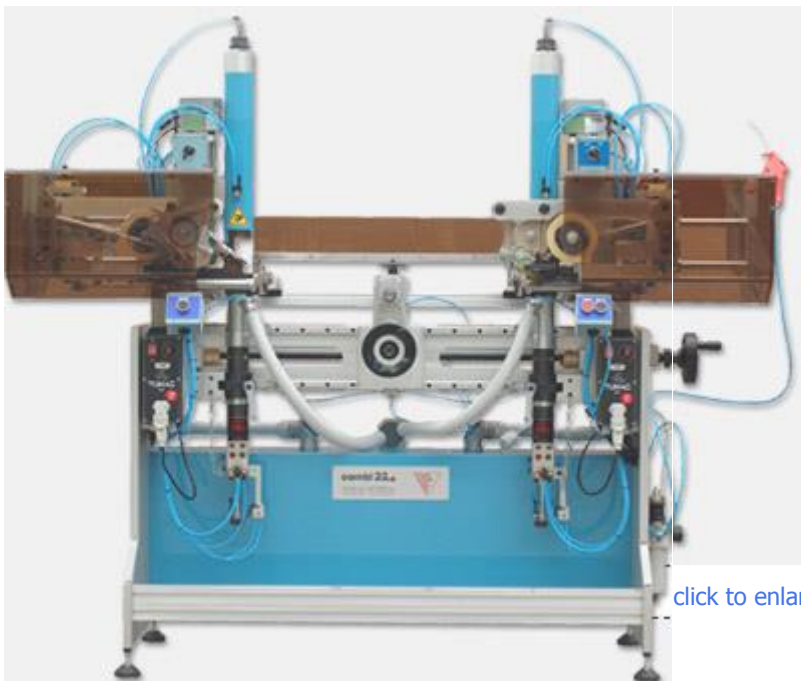

[click to enlarge »](#)

TECHNICAL DATA:

Max machine dimension: **1760 x 1450 x 750 mm**

Min machine dimension: **1300 x 1450 x 550 mm**

Pins feeding: **Automatic**

Pins length: **18 - 20 mm**

Pins diameter: **3.00 - 3.17 - 4.00 - 5.00 mm**

Stack dimension: **Min 280 x 350mm - Max 720 x 600mm**

Holes distance and Y position stop with continuous regulation by hand wheels(easy measure reading by mechanical counters).

Hydraulic brakes for infeed absorber (quick approaching, regular feed and absence of burr on return feed).

SUGINO drilling units (High quality supplier and worldwide service)

Air pressure feeding group **extremely accessible** for inspection and cleaning

